





## Medallion Fence

10651 KEELE STREET  
 MAPLE, ONTARIO L6A 3Y9  
 (T) 905-832-2922 || 1-800-794-1564 || (F) 905-832-1564  
 info@medallionfence.com || www.medallionfence.com

**Style:**  
 STERLING

**Series:**  
 OXFORD™

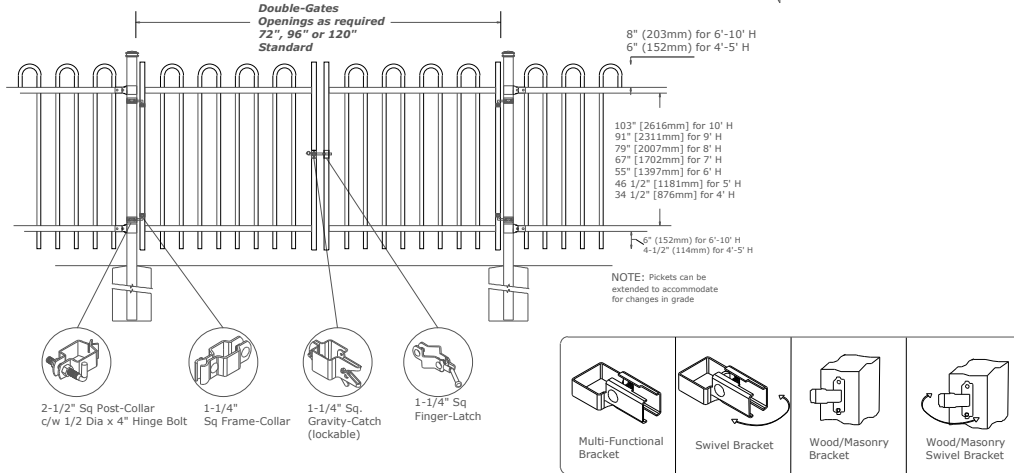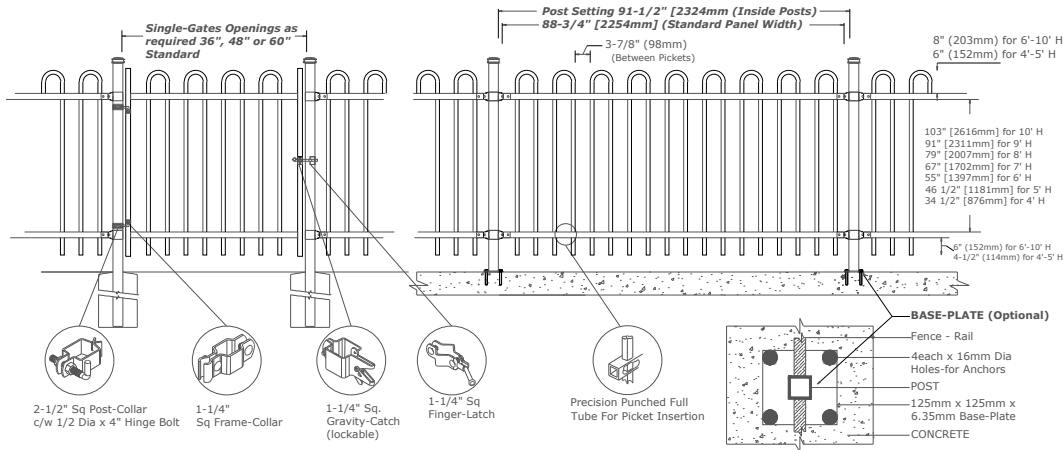

**MATERIAL SPECIFICATIONS:**  
 ARMOUR-SHIELD™  
 BY MEDALLION FENCE

PROTECTED BY



OPTIONAL POST CAPS



## SPECIFICATIONS

### TUBE COMPOSITION - POSTS, RAILS & PICKETS

Coated Cold Formed ERW Tubing

- o A minimum protective coating weight of 275gm/m<sup>2</sup> both interior and exterior
- o Top coat consisting of a chromium-free phosphate conversion coating
- o Coating conforming to ASTM A1046 for hot dip coatings comprising of Zinc, Aluminum and Magnesium
- o ERW tube conforming to ASTM A787 Type 6
- o Minimum Yield Strength 207 MPa and Minimum Tensile Strength 290 MPa
- o Weld seams mill re-metalized

## MATERIAL DIMENSIONS

PICKET	<b>1"X1" (25mm x 25mm)</b> 16 GA
RAILS	<b>1-1/2" x 1-1/2" (38mm x 38mm)</b> 14 GA
POSTS	<b>2-1/2" x 2-1/2" (64mm x 64mm)</b> 14 GA
OPTIONAL POST(1) REGULAR or BASE-PLATED	ALLIED SS40 2-1/2" (64mm) Sq./3" (76mm) Sq./4" (102mm) Sq
OPTIONAL POST(2) REGULAR or BASE-PLATED	SCH 40 HDG 2-1/2" (64mm) Sq./3" (76mm) Sq./4" (102mm) Sq

<b>WELDS</b>	Stainless Steel Mig Weld
<b>FITTINGS</b>	13 Gauge Stamp Forged Finish as below
<b>FITTING FASTENERS</b>	JS1000 Plated Finish as below
<b>OPTIONAL FASTENER</b>	Tamper Proof Nuts

## FINISH

<b>GRADE</b>	Super Durable Polyester Powder Coat
<b>OPTIONAL PRIMER</b>	Zinc Rich Epoxy Powder Coat
<b>STANDARD COLOUR</b>	SEMI-GLOSS - BLACK
<b>OTHER COLOURS</b>	Green, Brown, White, Antique Silver
<b>CUSTOM COLOURS</b>	Per Specifications

<b>STANDARD HEIGHT</b>	4'	5'	6'	7'	8'	9'	10'
	1219mm	1524mm	1892mm	2134mm	2438mm	2743mm	3048mm
Custom heights are available (upon request)							

<b>STANDARD GATES</b>	Passage, Double Entry, Cantilever
-----------------------	-----------------------------------