




## Medallion Fence

10651 KEELE STREET  
 MAPLE, ONTARIO L6A 3Y9  
 (T) 905-832-2922 || 1-800-794-1564 || (F) 905-832-1564  
 info@medallionfence.com || www.medallionfence.com

Medallion Fence

**Style:**  
 CAVALIER

**Series:**  
 OXFORD™

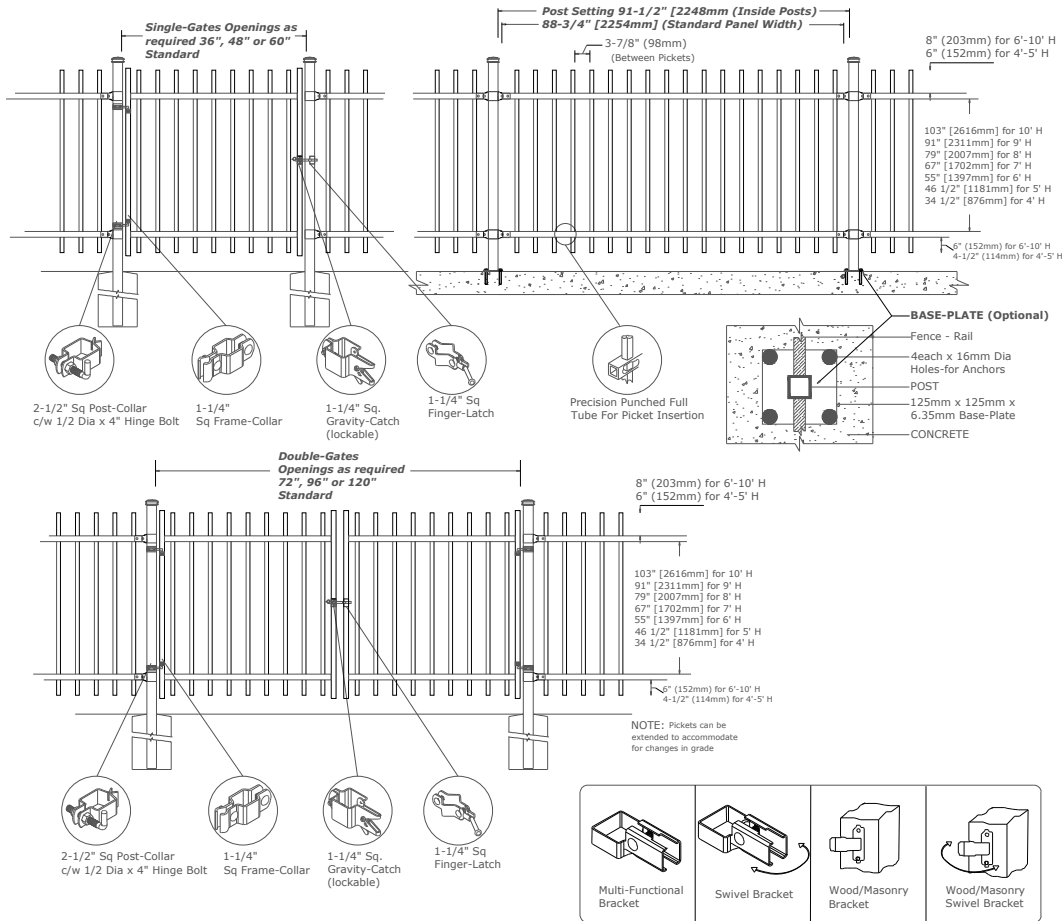

### MATERIAL SPECIFICATIONS:

ARMOUR-SHIELD™  
 BY MEDALLION FENCE

PROTECTED BY



ARMOUR-SHIELD

### OPTIONAL POST CAPS



PYRAMID



BALL



SPIRAL

## SPECIFICATIONS

### TUBE COMPOSITION - POSTS, RAILS & PICKETS

Coated Cold Formed ERW Tubing

- o A minimum protective coating weight of 275gm/m<sup>2</sup> both interior and exterior
- o Top coat consisting of a chromium-free phosphate conversion coating
- o Coating conforming to ASTM A1046 for hot dip coatings comprising of Zinc, Aluminum and Magnesium
- o ERW tube conforming to ASTM A787 Type 6
- o Minimum Yield Strength 207 MPa and Minimum Tensile Strength 290 MPa
- o Weld seams mill re-metallized

## MATERIAL DIMENSIONS

|  |   |
|--|---|
| PICKET                                     | <b>1"X1" (25mm x 25mm)</b> 16 GA                          |
| RAILS                                      | <b>1-1/2" x 1-1/2" (38mm x 38mm)</b> 14 GA                |
| POSTS                                      | <b>2-1/2" x 2-1/2" (64mm x 64mm)</b> 14 GA                |
| OPTIONAL POST(1)<br>REGULAR or BASE-PLATED | ALLIED SS40 2-1/2" (64mm) Sq./3" (76mm) Sq./4" (102mm) Sq |
| OPTIONAL POST(2)<br>REGULAR or BASE-PLATED | SCH 40 HDG 2-1/2" (64mm) Sq./3" (76mm) Sq./4" (102mm) Sq  |

|                   |                                       |
|-------------------|---------------------------------------|
| <b>WELDS</b>      | Stainless Steel Mig Weld              |
| <b>FITTINGS</b>   | 13 Gauge Stamp Forged Finish as below |
| FITTING FASTENERS | JS1000 Plated Finish as below         |
| OPTIONAL FASTENER | Tamper Proof Nuts                     |

## FINISH

|                 |                                     |
|-----------------|-------------------------------------|
| <b>GRADE</b>    | Super Durable Polyester Powder Coat |
| OPTIONAL PRIMER | Zinc Rich Epoxy Powder Coat         |
| STANDARD COLOUR | SEMI-GLOSS - BLACK                  |
| OTHER COLOURS   | Green, Brown, White, Antique Silver |
| CUSTOM COLOURS  | Per Specifications                  |

|                        |   |           |           |           |           |           |            |
|------------------------|---|-----------|-----------|-----------|-----------|-----------|------------|
| <b>STANDARD HEIGHT</b> | 4' 1219mm                                   | 5' 1524mm | 6' 1892mm | 7' 2134mm | 8' 2438mm | 9' 2743mm | 10' 3048mm |
|                        | Custom heights are available (upon request) |           |           |           |           |           |            |

|                |                                   |
|----------------|-----------------------------------|
| STANDARD GATES | Passage, Double Entry, Cantilever |
|----------------|-----------------------------------|