





## Medallion Fence

10651 KEELE STREET  
 MAPLE, ONTARIO L6A 3Y9  
 (T) 905-832-2922 | 1-800-794-1564 | (F) 905-832-1564  
 info@medallionfence.com | www.medallionfence.com

**Style:**  
 CAVALIER-DR-SF-REP

**Series:**  
 OXFORD™

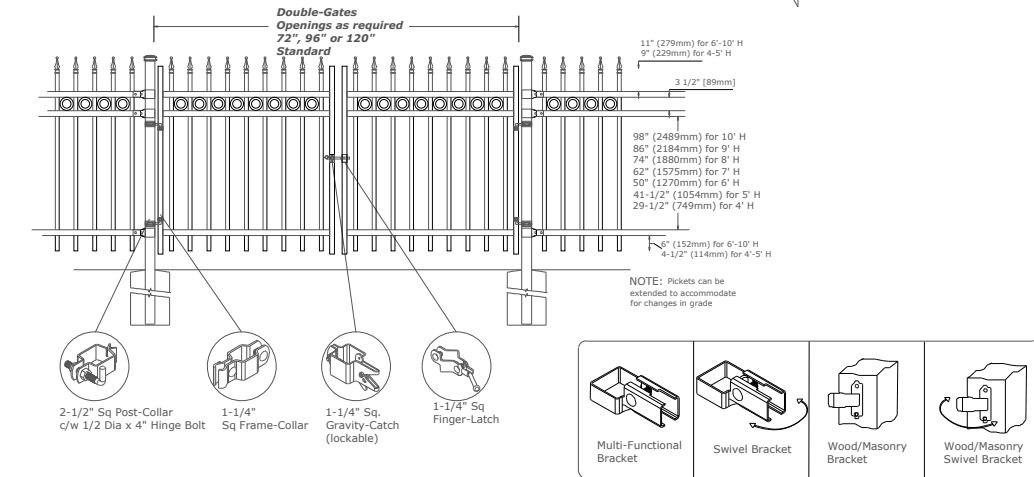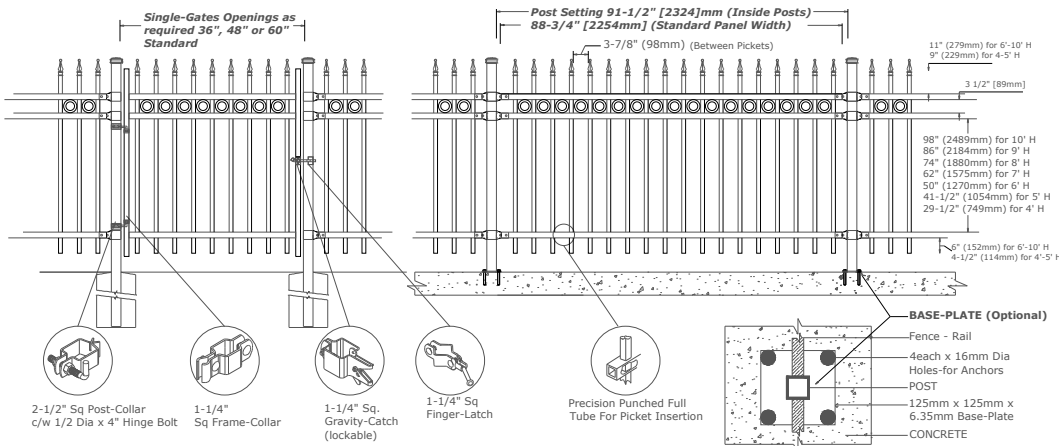

### MATERIAL SPECIFICATIONS:

ARMOUR-SHIELD™  
 BY MEDALLION FENCE

### PROTECTED BY



### OPTIONAL CAST FINIAL



Maple Leaf



Fleur Des Lis (FF)

### OPTIONAL POST CAPS



PYRAMID



BALL



SPIRAL

## SPECIFICATIONS

### TUBE COMPOSITION - POSTS, RAILS & PICKETS

Coated Cold Formed ERW Tubing

- o A minimum protective coating weight of 275gm/m<sup>2</sup> both interior and exterior
- o Top coating consisting of a chromium-free phosphate conversion coating
- o Coating conforming to ASTM A1046 for hot dip coatings comprising of Zinc, Aluminum and Magnesium
- o ERW tube conforming to ASTM A787 Type 6
- o Minimum Yield Strength 207 MPa and Minimum Tensile Strength 290 MPa
- o Weld seams mill re-metalized

## MATERIAL DIMENSIONS

PICKET	<b>1"X1" (25mm x 25mm)</b> 16 GA
RAILS	<b>1-1/2" x 1-1/2" (38mm x 38mm)</b> 14 GA
POSTS	<b>2-1/2" x 2-1/2" (64mm x 64mm)</b> 14 GA
OPTIONAL POST(1) REGULAR or BASE-PLATED	ALLIED SS40 2-1/2" (64mm) Sq./3"(76mm) Sq./4"(102mm) Sq
OPTIONAL POST(2) REGULAR or BASE-PLATED	SCH 40 HDG 2-1/2" (64mm) Sq./3" (76mm) Sq./4" (102mm) Sq

<b>WELDS</b>	Stainless Steel Mig Weld
--------------	--------------------------

<b>FITTINGS</b>	13 Gauge Stamp Forged Finish as below
-----------------	---------------------------------------

FITTING FASTENERS	JS1000 Plated Finish as below
-------------------	-------------------------------

OPTIONAL FASTENER	Tamper Proof Nuts
-------------------	-------------------

## FINISH

<b>GRADE</b>	Super Durable Polyester Powder Coat
OPTIONAL PRIMER	Zinc Rich Epoxy Powder Coat
STANDARD COLOUR	SEMI-GLOSS - BLACK
OTHER COLOURS	Green, Brown, White, Antique Silver
CUSTOM COLOURS	Per Specifications

<b>STANDARD HEIGHT</b>	4'-3" 1295mm	5'-3" 1600mm	6'-3" 1905mm	7'-3" 2210mm	8'-3" 2515mm	9'-3" 2819mm	10'-3" 3124mm
	Custom heights are available (upon request)						

STANDARD GATES	Passage, Double Entry, Cantilever
----------------	-----------------------------------